

OpenAir™

Air damper actuators

GEB..1E



Electronic rotary actuators for 2-position, 3-position, and modulating control

- Nominal torque 20 Nm
- Operating voltage AC 24 V ~ / DC 24...48 V = or AC 100...240 V ~
- Mechanically adjustable span between 0...90°
- Pre-wired with standard 0.9 m connection cables
- Type-specific variations with adjustable offset and span for the positioning signal
- Position indication: Mechanical and electrical
- Feedback potentiometer
- Self-adaption of the rotation angle range and adjustable auxiliary switches for supplemental functions





Use

Rotary actuators are used in ventilation and air conditioning plants to regulate and shut off air dampers:

- For damper areas up to approximately 4 m² (Guideline: Always comply with the damper manufacturer's specifications).
- Suitable for use with 2-position and 3-position controllers as well as modulating controllers (DC 0/2...10 V) to control air dampers.
- We recommend a minimum pulse length of 500 ms on rotary actuators operated with 3-point control to ensure continuous and accurate operation.

Functions

GEB..	AC 24 V ~ / DC 24...48 V -	141.1E / 142.1E / 146.1E	161.1E / 163.1E / 164.1E / 166.1E
	AC 100...240 V ~	341.1E / 346.1E	361.1E
Control type	2-position / 3-position	Modulating control (0/2...10 V)	
Rotary movement, rotary direction	Clockwise or counterclockwise direction depends on the type of control ... on the setting of the rotary direction switch. CW  CCW  The actuator remains in the respective position with no power applied. cw = Clockwise ccw = Counterclockwise	... on the setting on the DIL switch clockwise / counterclockwise CW  CCW  ... on the positioning signal. The actuator remains in the deployed position: ...if the positioning signal is maintained at a constant value ...in the event of power loss	
Position indication Mechanical	Rotation angle position indication using a position indicator.		
Position indication Electric	By connecting the feedback potentiometer to external voltage, output voltage is generated proportional to rotation angle.	Position indicator: Output voltage U = DC 0/2...10 V is generated proportional to rotation angle. The direction of rotation (inverted or non-inverted) for output voltage U is based on the DIL switch position.	
Auxiliary switch	The switching points for auxiliary switches A and B can be set independently in increments of 5° from 0 to 90°.		
Self-adaptation of the rotation angle range	 - The actuator automatically determines the mechanical end positions of the rotation angle range. The characteristic function (U ₀ , ΔU) is mapped to the calculated rotation angle range. Power must be connected to DIL switch 2 (self-adaptation) for the function to operate.		
Manual adjustment	The actuator can be manually adjusted by pressing the gear train disengagement button.		
Rotation angle limitation	A set screw can limit the rotation angle to between 0° and 90°.		

Technical design

Housing

- Robust and light cast aluminum housing. The housing guarantees long life, even under harsh ambient conditions.

Actuator / gears

- Brushless, robust DC motors ensure reliable operation regardless of load. The damper actuators do not require an end position switch, are overload proof, and remain in place upon reaching the end stop.
- The gears are maintenance free and low noise.

Type summary

Type	Stock number	Open-loop control	Operating voltage	Positioning signal input Y	Position indicator U = DC 0...10 V -	Feedback potentiometer 5 kΩ	Self-adapting rotation angle ranges	Auxiliary switch	Rotation direction switch						
GEB141.1E	S55499-D329	2- or 3-position	AC 24 V ~ / DC 24...48 V -	-	-	Yes	-	-	Yes						
GEB142.1E	S55499-D330														
GEB146.1E	S55499-D331		AC 100...240 V ~		-	-		2							
GEB341.1E	S55499-D336														
GEB346.1E	S55499-D337														
GEB161.1E	S55499-D332	Modulating	AC 24 V ~ / DC 24...48 V -	-	DC 0/2...10 V -	Yes	Yes	-	Yes						
GEB163.1E	S55499-D333				DC 0...35 V -										
GEB164.1E	S55499-D334				DC 0/2...10 V -			2							
GEB166.1E	S55499-D335		AC 100...240 V ~												
GEB361.1E	S55499-D338														

Accessories/spare parts

See data sheet N4697

Product documentation

Topic	Title	Document ID
Data sheet	Air damper actuators	A6V11449860
Technical principles	Non-spring rotary actuators GEB...1	Z4621
Mounting Instructions	GEB..1E	A6V11476940
Data sheet	Accessory and spare parts for air damper actuators	N4697

Related documents such as environmental declarations, CE declarations, etc., can be downloaded at the following Internet address:


<http://siemens.com/bt/download>

Safety

	CAUTION
National safety regulations	
Failure to comply with national safety regulations may result in personal injury and property damage.	
	<ul style="list-style-type: none">● Observe national provisions and comply with the appropriate safety regulations.● Mounting, commissioning, and service by properly trained personnel only.

Engineering**Auxiliary switch and potentiometer**

Cannot be integrated after the fact.

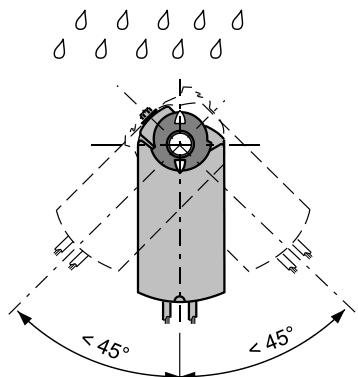Mounting

See Mounting instructions M4621

Shaft connection

When mounting, comply with the notes on shaft diameters and damper surface areas in Technical data (page 8) and use only quality materials typical to the sector for the damper shaft.

Installation

	WARNING
No internal line protection for supply lines to external consumers	
Risk of fire and injury due to short-circuits!	
	<ul style="list-style-type: none">● Adapt the line diameters as per local regulations to the rated value of the installed fuse.

Maintenance

The GEB..1E actuators are maintenance-free.

Disposal



The device is considered an electronic device for disposal in accordance with the European Guidelines and may not be disposed of as domestic garbage.

- Dispose of the device through channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

Technical data

Power supply (GEB1..1E)			
Operating voltage (SELV/PELV)			AC 24 V ~ ± 20 % (19.2...28.8 V ~) DC 24...48 V = ± 20 % (19.2...57.6 V =) ¹⁾
Frequency			50/60 Hz
Power consumption:	During operation	GEB14..1E GEB16..1E	2.3 VA / 1.1 W 2.5 VA / 1.2 W
	Holding	GEB14..1E GEB16..1E	0.5 W 0.65 W

Power supply (GEB3..1E)			
Operating voltage (SELV/PELV)			AC 100...240 V ~ ± 10 % (90...264 V ~)
Frequency			50/60 Hz
Power consumption:	During operation	GEB34..1E GEB36..1E	4 VA / 1.6 W 3.4 VA / 1.3 W
	Holding	GEB34..1E GEB36..1E	0.9 W 0.6 W

Function data			
Nominal torque			20 Nm
Maximum torque (when blocked)		35 Nm ²⁾	
Minimum holding torque		20 Nm	
Nominal rotation angle (with position indication)			90°
Maximum rotation angle (mechanically limited)		95° ± 2°	
Runtime at nominal rotation angle 90°			150 s
Actuator sound power level (at a positioning time of 150 s)			<35 dB(A)

Inputs			
Positioning signal for GEB14..1E			
Operating voltage AC 24 V ~ / DC 24...48 V =		(wires 1-6/G-Y1) (wires 1-7/G-Y2)	Clockwise Counterclockwise
Positioning signal for GEB34..1E			
Operating voltage AC 100...240 V ~		(wires 1-6/G-Y1) (wires 1-7/G-Y2)	Clockwise Counterclockwise
Positioning signal for GEB16..1E			
Input voltage Power consumption Input resistance		(wires 8-2/Y-G0)	DC 0/2...10 V = 0.1 mA >100 kΩ
Max. permissible input voltage			DC 35 V = limited internally to DC 10 V =
Protected against faulty wiring			Max. AC 24 V ~ / DC 24...48 V =
Hysteresis for non-adjustable characteristic function for adjustable characteristic function			60 mV 0.6 % of ΔU
Adjustable characteristic (GEB163.1E, GEB164.1E)			
Adjustable with 2 potentiometers:		Offset U _o Span ΔU	DC 0...5 V = DC 2...30 V =
Max. input voltage Protected against faulty wiring			DC 35 V = Max. AC 24 V ~ / DC 24...48 V =

¹⁾ cUL: Only to DC 30 V = permissible

²⁾ See notes on page 4 and page 8

Outputs		
Position indicator		
Output signal (GEB16..1E)	(wires 9-2/U-G0)	
Output signal (GEB36..1E)	(wires 9-2/U-G-)	
Output voltage U		DC 0...10 V =
Max. output current		DC \pm 1 mA
Protected against faulty wiring		Max. AC 24 V ~ / DC 24...48 V =
Aux. power supply (G-/G+)	GEB36..	DC 24 V = \pm 20 %, max. 10 mA
Feedback potentiometer (for GEB142.1E)		
Change in resistance	(wires P1-P2)	0...5000 Ω
Load		<0.25 W
Max. contact current		<0.1 mA
Permissible voltage at potentiometer (SELV/PELV)		AC 24 V ~ / DC 24...48 V =
Insulation resistance between potentiometer and housing		AC 500 V ~

Auxiliary switches (GEB146.1E, GEB166.1E, GEB346.1E)		
Switching voltage		AC 24...250 V ~ / DC 12...30 V =
Contact loading		6 A resistive, 2 A inductive, min. 10 mA @ AC 4 A resistive, 2 A inductive, min. 10 mA @ DC 30 V = 0.8 A resistive, 0.5 A inductive, min. 10 mA @ DC 60 V =
Electric strength auxiliary switch against housing		AC 4 kV
Switching range for auxiliary switches / setting increments		5°...90° / 5°
Factory switch setting:	Switch A	5°
	Switch B	85°

Connection cables		
Cable length		0.9 m
Cross-section		0.75 mm ²
Permissible length for signal wires		300 m

Protection class and degree of protection		
Protection class		EN 60730
AC 24 V ~ / DC 24...48 V =, feedback potentiometer		III
AC 100...240 V ~, auxiliary switches		II
Degree of protection of housing		IP54 as per EN 60529 (see "Mounting", page 4, and Mounting instructions A6V11476940)

Environmental conditions		
Operation		IEC 60721-3-3
Climatic conditions		Class 3K5
Mounting location		interior, weather-protected
Temperature		-32...55 °C
Humidity, non-condensing		<95 % r.h.
Transportation		IEC 60721-3-2
Climatic conditions		Class 2K3
Temperature		-32...70 °C
Humidity, non-condensing		<95 % r.h.
Storage		IEC 60721-3-1
Climatic conditions		Class 1K3
Temperature		-32...50 °C
Humidity, non-condensing		<95 % r.h.
Mechanical conditions		Class 2M2

Standards, directives and approvals	
Product standards	EN60730 Part 2-14: Particular requirements for electric actuators
Electromagnetic compatibility (field of use)	For residential, commercial, and industrial environments
EU conformity (CE)	A5W00004376 ³⁾
RCM conformity	A5W00004377 ³⁾
UKCA conformity	A5W00198170A ³⁾
EAC compliance	Eurasian conformity
UL Federal Communications Commission	UL as per 60730 http://ul.com/database cUL as per CSA-C22.2 No. 24-93

Environmental compatibility
The product environmental declaration A5W00055607 ³⁾ contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).

Dimensions	
Actuator (W x H x D)	See "Dimensions" (page 11)
Damper shaft	
Round	8...20.5 mm
Square (diagonal)	8...14.5 mm
Min. length	20 mm
Max. shaft hardness	<300 HV

Weight	
Excl. packaging	Max. 1.1 kg, without auxiliary switches Max. 1.3 kg, with auxiliary switches


³⁾ Documents can be downloaded at <http://siemens.com/bt/download>.

!	NOTICE <p>Shaft connection – Important notes for the manufacturer / installer</p> <p>Use of unsuitable damper shafts may damage the damper or damper shaft.</p> <ul style="list-style-type: none"> ● Use only damper shafts with diameters suitable for the damper surface. ● Use only quality materials typical for the sector for damper shafts/rods.
----------	---


Connection diagrams

Internal Diagrams


GEB14..1E
(open-close, 3-position control)

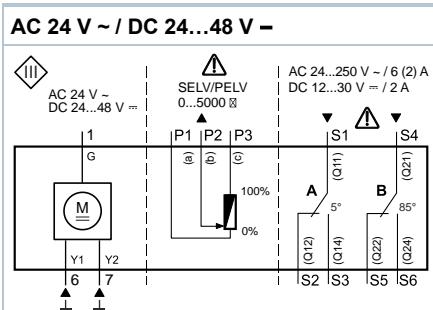


GEB34..1E
(open-close, 3-position control)

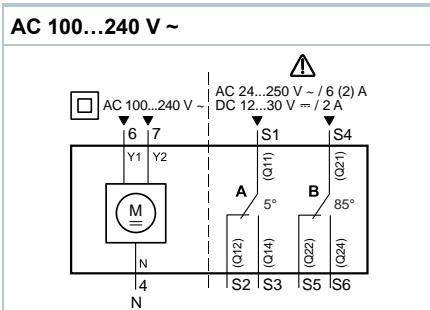


GEB16..1E
(modulating, Y = DC 0/2...10 V~)

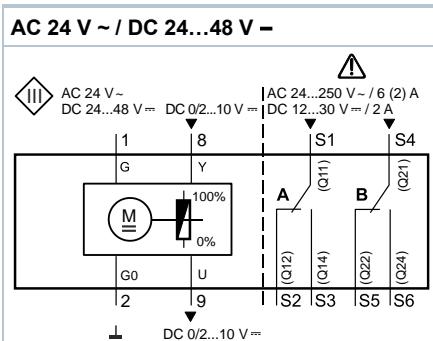

GEB16..1E
(modulating, Y = DC 0...35 V~)

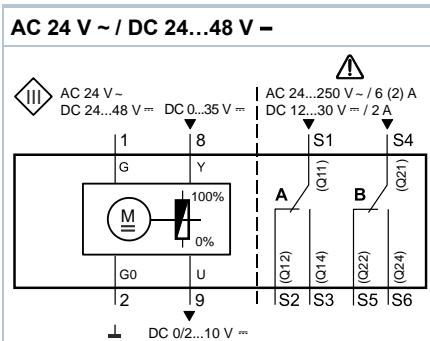

GEB361..1E
(modulating, Y = DC 0/2...10 V~)

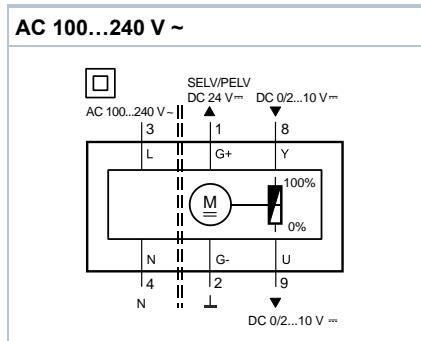


Connection diagrams

Control on GEB1..1E (AC 24 V~ / DC 24...48 V~)

Open-close, single wire control	Open-close, double wire control	3-position control	Modulating control
Single pole single throw (SPST)	Single pole double throw (SPDT)		


Control on GEB3..1E (AC 100...240 V ~)

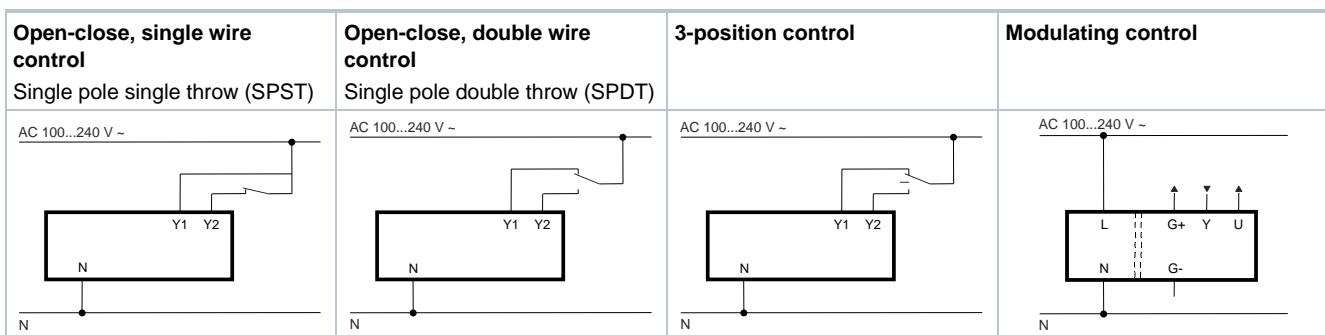

Cable designations

Connecting thread	Code	No.	Color	Abbreviation	Meaning
Actuators AC 24 V ~ / DC 24...48 V =	G	1	red	RD	System potential AC 24 V ~ / DC 24...48 V =
	G0	2	black	BK	System zero
	Y1	6	violet	VT	Positioning signal AC/DC 0 V, clockwise (GEB14..1E)
	Y2	7	orange	OG	Positioning signal AC/DC 0 V, counterclockwise (GEB14..1E)
	Y	8	gray	GY	Signal input (GEB16..1E)
	U	9	pink	PC	Signal output (GEB16..1E)
Actuators AC 100...240 V ~	L	3	brown	BR	Phase, AC 100...240 V ~
	N	4	light blue	BU	Neutral conductor
	Y1	6	black	BK	Positioning signal AC 100...240 V ~, clockwise (GEB34..1E)
	Y2	7	white	WH	Positioning signal AC 100...240 V ~, counterclockwise (GEB34..1E)
	G+	1	red	RD	System potential DC 24 V (auxiliary power) (GEB361.1E)
	G-	2	black	BK	System neutral (auxiliary power) (GEB361.1E)
	Y	8	gray	GY	Signal input (GEB361.1E)
	U	9	pink	PK	Signal output (GEB361.1E)
Feedback potentiometer	a	P1	white/red	WH RD	Potentiometer 0...100 % (P1-P2)
	b	P2	white/blue	WH BU	Potentiometer pick-off
	c	P3	white/pink	WH PK	Potentiometer 100...0 % (P3-P2)
Auxiliary switch	Q11	S1	gray/red	GY RD	Switch A input
	Q12	S2	gray/blue	GY BU	Switch A NC contact
	Q14	S3	gray/pink	GY PK	Switch A NO contact
	Q21	S4	black/red	BK RD	Switch B input
	Q22	S5	black/blue	BK BU	Switch B Normally closed contact
	Q24	S6	black/pink	BK PK	Switch B NO contact

Dimensions

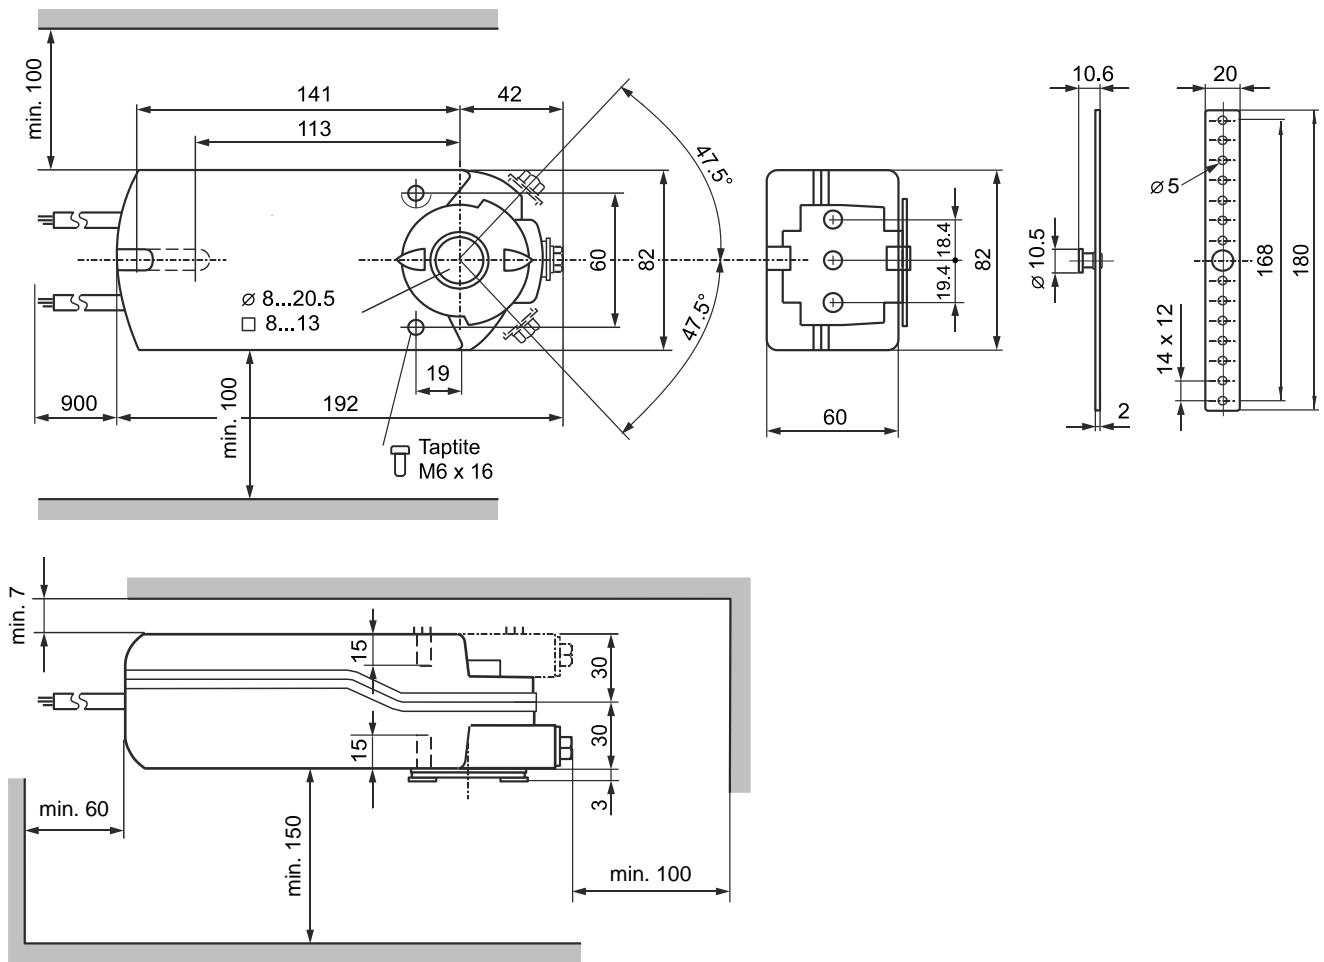

Revision numbers

Type	Valid from rev. no.	Type	Valid from rev. no.
GEB141.1E S55499-D329	..A	GEB164.1E S55499-D334	..A
GEB142.1E S55499-D330	..A	GEB166.1E S55499-D335	..A
GEB146.1E S55499-D331	..A	GEB341.1E S55499-D336	..A
GEB161.1E S55499-D332	..A	GEB346.1E S55499-D337	..A
GEB163.1E S55499-D333	..A	GEB361.1E S55499-D338	..A

Issued by
Siemens Switzerland Ltd
Smart Infrastructure
Global Headquarters
Theilerstrasse 1a
6300 Zug
Switzerland
Tel. +41 58-724 24 24
www.siemens.com/buildingtechnologies

© Siemens Switzerland Ltd, 2019
Technical specifications and availability subject to change without notice.